



Technical data

Material	Stainless steel (rustproof, cold resistant to -45 °C)
Surface	Plain
Nominal tensile strength	≤ 2160 N/mm ²
Loss factor	0,9

Fill factor range


Fill factor f	0,64...0,78
---------------	-------------

Application area

High performance rotation-resistant ropes

Combination products

Pouch Socket PSH 22A

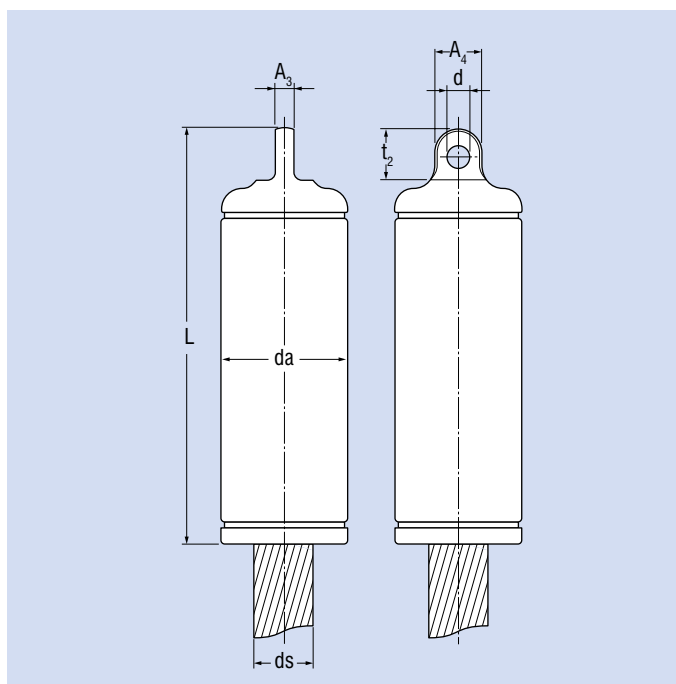

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds	A ₃	A ₄	da	da Tol	d	L	L Tol	t ₂	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
214369	16	14	10	24	36	+0,4	12	116	+2	24	0,66
214372	16	15	10	24	36	+0,4	12	116	+2	24	0,6
214286	16	16	10	24	36	+0,4	12	116	+2	24	0,5
214374	19	17	10	24	44	+0,4	12	135	+2	24	1,2
214377	19	18	10	24	44	+0,4	12	135	+2	24	1,1
214386	19	19	10	24	44	+0,4	12	135	+2	24	1
214388	22	20	10	24	48	+0,4	12	154	+3	26	1,6
214398	22	21	10	24	48	+0,4	12	154	+3	26	1,5
214400	22	22	10	24	48	+0,4	12	154	+3	26	1,4
214409	26	23	10	24	56	+0,6	12	181	+4	26	2,6
214408	26	24	10	24	56	+0,6	12	181	+4	26	2,6
214405	26	25	10	24	56	+0,6	12	181	+4	26	2,5
214148	26	26	10	24	56	+0,6	12	181	+4	26	2,5
214410	29	27	10	24	62	+0,6	12	202	+4	28	3,6
214128	29	28	10	24	62	+0,6	12	202	+4	28	3,4
213983	29	29	10	24	62	+0,6	12	202	+4	28	3,2
214417	32	30	10	24	68	+0,6	12	220	+4	28	4,9
214413	32	31	10	24	68	+0,6	12	220	+4	28	4,7
212709	32	32	10	24	68	+0,6	12	220	+4	28	4,5
214421	36	33	10	24	78	+0,8	12	252	+4	28	7,7
214420	36	34	10	24	78	+0,8	12	252	+4	28	7,4
214419	36	35	10	24	78	+0,8	12	252	+4	28	7,1

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!

Reference no.	NG	ds	A ₃	A ₄	da	da Tol	d	L	L Tol	t ₂	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
213984	36	36	10	24	78	+0,8	12	252	+4	28	6,8
229694	40	37	16	40	86	+0,8	20	280	+5	40	9,3
229695	40	38	16	40	86	+0,8	20	280	+5	40	9
229696	40	39	16	40	86	+0,8	20	280	+5	40	8,7
229697	40	40	16	40	86	+0,8	20	280	+5	40	8,4

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!