



Technical data

Material	Stainless steel (rustproof, cold resistant to -45 °C)
Surface	Plain
Nominal tensile strength	≤ 2160 N/mm ²
Loss factor	0,9

Fill factor range


Fill factor f	0,64...0,78
---------------	-------------

Application area

Rotation-resistant and non-rotation-resistant ropes

Combination products

Pouch Socket PSH 22A

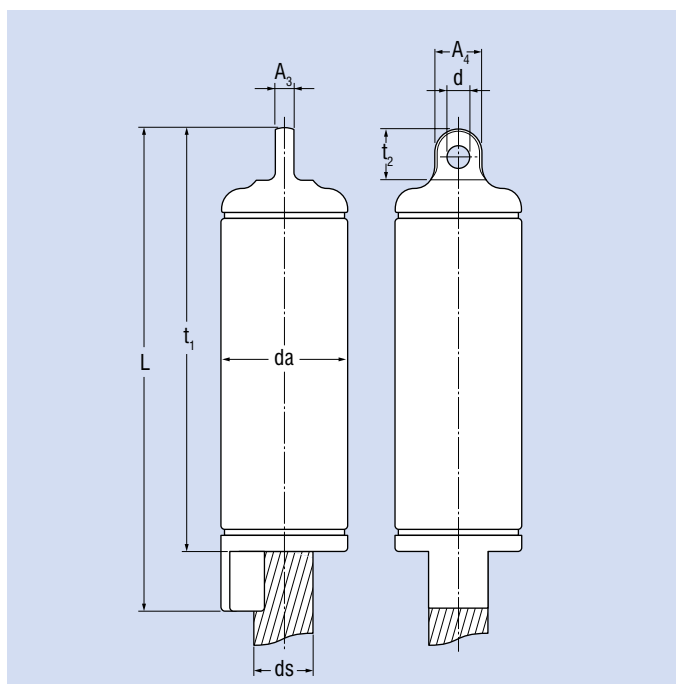

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds	A ₃	A ₄	da	da Tol	d	L	t ₁	t ₁ Tol	t ₂	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
214426	16	14	10	24	36	+0,8	12	127	116	+3	24	0,7
214429	16	15	10	24	36	+0,8	12	127	116	+3	24	0,7
214290	16	16	10	24	36	+0,8	12	127	116	+3	24	0,6
214434	19	17	10	24	44	+0,8	12	148	135	+3	24	1,3
214435	19	18	10	24	44	+0,8	12	148	135	+3	24	1,2
214437	19	19	10	24	44	+0,8	12	148	135	+3	24	1
214439	22	20	10	24	48	+1	12	172	157	+4	26	1,7
214440	22	21	10	24	48	+1	12	172	157	+4	26	1,6
214441	22	22	10	24	48	+1	12	172	157	+4	26	1,6
214446	26	23	10	24	56	+1	12	199	181	+4	26	2,8
214450	26	24	10	24	56	+1	12	199	181	+4	26	2,7
214451	26	25	10	24	56	+1	12	199	181	+4	26	2,6
214156	26	26	10	24	56	+0,8	12	199	181	+3	26	2,6
214452	29	27	10	24	62	+1,2	12	222	202	+5	28	3,8
214125	29	28	10	24	62	+0,8	12	222	202	+3	28	3,5
213981	29	29	10	24	62	+0,8	12	222	202	+3	28	3,3
214453	32	30	10	24	68	+1	12	242	220	+4	28	5
214461	32	31	10	24	68	+1	12	242	220	+4	28	4,8
212710	32	32	10	24	68	+0,8	12	242	220	+3	28	4,6
214462	36	33	10	24	78	+1	12	276	252	+4	28	7,7
214463	36	34	10	24	78	+1	12	276	252	+4	28	7,4
214464	36	35	10	24	78	+1	12	276	252	+4	28	7,1

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!

Reference no.	NG	ds	A ₃	A ₄	da	da Tol	d	L	t ₁	t ₁ Tol	t ₂	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
213982	36	36	10	24	78	+0,8	12	276	252	+3	28	6,8
229698	40	37	16	40	86	+1	20	307	280	+4	40	9,3
229699	40	38	16	40	86	+1	20	307	280	+4	40	9
229700	40	39	16	40	86	+1	20	307	280	+4	40	8,7
229701	40	40	16	40	86	+1	20	307	280	+4	40	8,4

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!