



Technical data


Material bolt	Quenched and tempered steel
Surface bolt	Improx oxidized
Material housing	Cast steel (cold resistant to -40 °C)
Surface housing	Hot-dip galvanised
Material wedge	Cast steel (cold resistant to -40 °C)
Surface wedge	Hot-dip galvanised
Loss factor	0,8

Application area

Round strand ropes

Combination products

13B

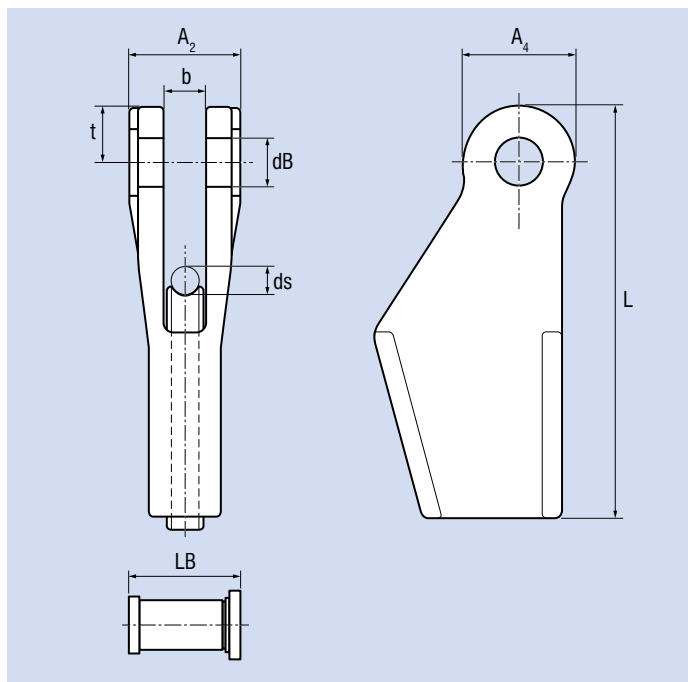

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds	A	A ₂	A ₄	A ₅	b	dB	LB	L	t	t ₆	WLL	MBL	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg
332400	36 / 34	34	235	137	140	90	53	62	133	515	70	231	385	1366	53,7
332337	36 / 36	36	235	137	140	90	53	62	133	515	70	231	385	1366	53,7

WLL = maximum payload

Different spare bolts on demand

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!