



Technical data

Material	Quenched and tempered steel (cold resistant to -40 °C)
Surface	ACC
Cast	Synthetic Resin
Nominal tensile strength	≤ 2160 N/mm ²
Loss factor	0,9

Fill factor range


Fill factor f	0,64...0,78
---------------	-------------

Application area

Rotation-resistant and non-rotation-resistant ropes

Combination products

Pouch Socket PSH 22A

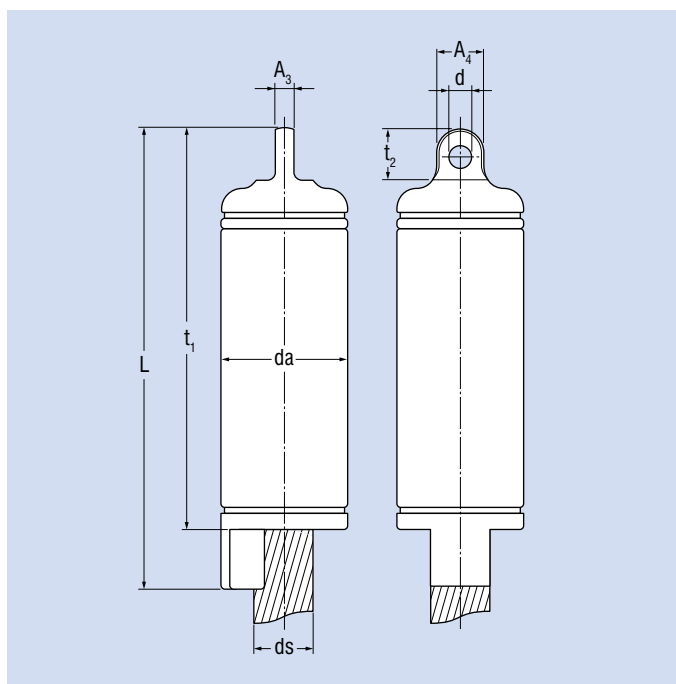

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds	A ₃	A ₄	da	da Tol	d	L	t ₁	t ₂	t ₂ Tol	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
214365	16	14 – 16	10	24	36	+0,8	12	127	116	24	+3	0,53
214538	19	17 – 19	10	24	44	+0,8	12	148	135	24	+3	0,78
214551	22	20 – 22	10	24	48	+1	12	172	157	26	+4	1,17
214140	26	23 – 26	10	24	56	+1	12	199	181	26	+4	1,89
214004	29	27 – 29	10	24	62	+1,2	12	222	202	28	+5	2,52
212716	32	30 – 32	10	24	68	+1,2	12	242	220	28	+5	3,24
214005	36	33 – 36	10	24	78	+1,4	12	276	252	30	+6	5,18
229639	40	37 – 40	16	40	86	+1,4	20	307	280	40	+6	7,08
231372	44	41 – 44	16	40	94	+1,6	20	338	308	40	+7	8,79
231378	48	45 – 48	16	40	104	+1,6	20	368	336	40	+7	12,07
231383	52	49 – 52	20	52	114	+1,8	24	399	364	50	+8	15,7
273867	56	53 – 56	20	52	122	+1,8	24	427	389	50	+8	20,8
272553	60	57 – 60	20	52	130	+1,8	24	460	420	50	+8	25,8

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!