



Technical data


Material Carbon steel (cold resistant to -20 °C)
Surface Plain

Application area

Round strand ropes

Combination products

Closed swaged fitting 16A

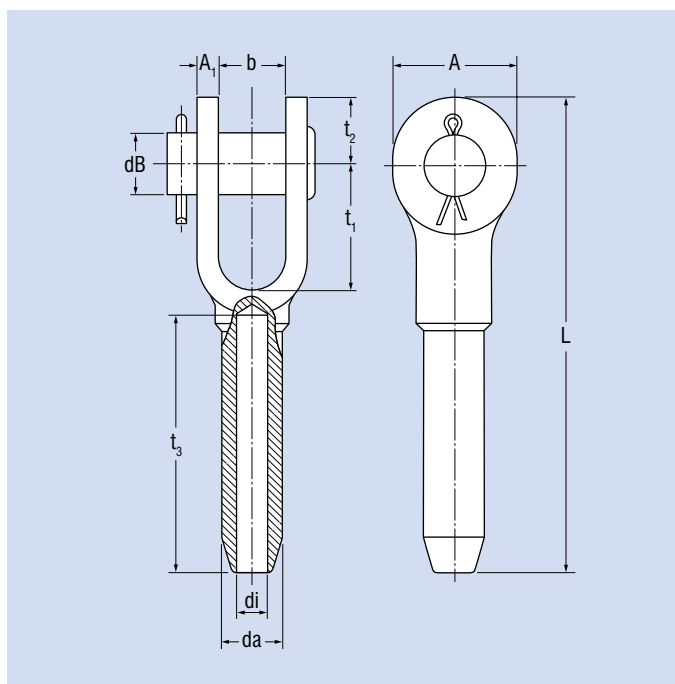

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds	A	A ₁	b	da	dB	di	L	t ₁	t ₂	t ₃	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
216002	6	6	35	8	17	12,7	17,5	6,85	121	38	19	54	0,25
216003	8	7 – 8	41	10	21	19,6	20,6	8,65	159	44	24	54	0,5
216004	10	9 – 10	41	10	21	19,6	20,6	10,4	159	44	24	81	0,5
216005	11	11	51	13	25	24,9	25,4	12,2	198	51	29	108	1,1
216006	13	12 – 13	51	13	25	24,9	25,4	14	198	51	29	108	1,1
216007	14	14	63	16	32	31,8	30,2	15,5	243	57	37	135	2,1
216008	16	15 – 16	63	16	32	31,8	30,2	17	243	57	37	135	2,1
216009	19	17 – 19	76	19	38	39,4	35,1	20,3	297	70	43	162	3,6
216010	22	20 – 22	86	23	44	43,2	41,1	23,9	346	83	51	189	5,3
216011	25	23 – 25	102	26	51	50,5	51	26,9	397	95	57	216	8,1
216012	29	26 – 29	114	30	57	57	57	30,2	444	108	63	243	13,5
216013	32	30 – 32	127	30	63	64,5	63,5	33,8	494	121	75	270	16,4
216014	35	33 – 35	133	33	63	71	63,5	36,8	540	133	80	297	21,4
216015	38	36 – 38	146	37	76	78	70	40,1	591	146	89	324	29,5
216016	44	42 – 44	178	43	89	86	89	47,2	689	171	105	378	42,2
216017	51	49 – 51	203	46	102	100	95,5	53,5	798	203	119	432	65,8
216018	57	55 – 57	222	65	114	113	108	59,9	835	171	130	486	93,5
216019	63	61 – 63	222	65	114	125,2	108	67,5	879	171	130	498	103
216020	76	74 – 76	241	76	146	150,6	133,4	80,4	1045	219	140	603	181,5

Pressed diameter on request

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!