




Technical data

Material	Cast steel (cold resistant to $-20\text{ }^{\circ}\text{C}$)
Surface bolt	galvanized
Surface housing	painted or galvanised
Nominal tensile strength	$\leq 2160\text{ N/mm}^2$
Loss factor	0,8

Application area

Round strand ropes

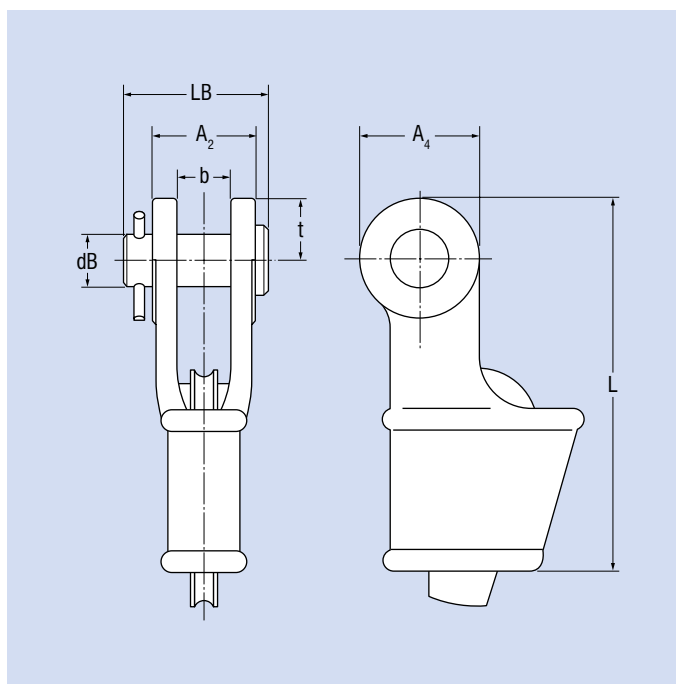

Don't use non-rotation resistant ropes with a turnable fixing point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death may occur.

NG	d_s mm	A_2 mm	A_4 mm	b mm	dB mm	LB mm	L mm	t mm	MBL kN	Weight kg
8	7 – 8	36	36	18	16	51	128	18	78	0,8
10	9 – 10	42,5	46	20,5	20,6	63	168	23	117	1,7
13	11 – 13	49	57	25	25	67	174,5	28,5	196	2,1
16	14 – 16	61	70	31	30	85	211	35	245	4
19	18 – 19	70	80	38	35	95	250	40	392	7
22	20 – 22	80	95	44	41	110	300	47,5	539	10
26	24 – 26	95	110	51	51	128	330	55	735	15
29	27 – 29	107	130	57	57	142	375	65	882	21
32	30 – 32	119	146	63	63	155	423	73	1079	31
36	34 – 36	126	148	70	64	160	474	74	1226	37
39	37 – 39	137	142	77	70	177	530	80	1471	51
42	40 – 42	142	160	76	76	187	587	87	1667	64
48	43 – 48	167	186	89	89	215	650	100	2207	96
52	49 – 52	203	205	101	95	244	745	105	2746	130
58	54 – 58	222	250	114	108	275	785	125	3600	180

On request with bolt and nut

Additional sizes on enquiry.

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!