




Technical data

Material	Cast iron
Surface	bright
Tolerance Fit	D13

Application area

Round strand rope pressed acc. to EN 13411-3

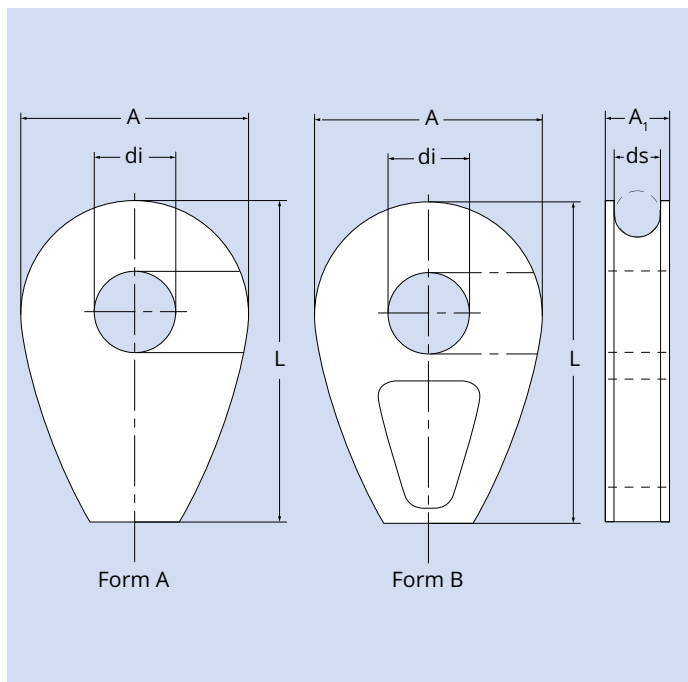

Don't use non-rotation resistant ropes with a turnable fixing point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death may occur.

Reference no.	Shape	NG	RW	A	A ₁	d _i	d _i _{max}	L	Weight
			mm	mm	mm	mm	mm	mm	kg
111409	A	8	8	40	15	14	20	66	0,2
111412	A	10	10	50	17,5	18	25	82	0,3
111419	A	12	12	60	20	21	30	98	0,5
111424	A	14	14	70	23,5	25	35	114	0,7
111426	B	16	16	80	26	28	40	130	0,8
111434	B	18	18	90	28,5	31	45	145	1,1
111440	B	20	20	100	31	35	50	161	1,4
111445	B	22	22	110	33,5	38	55	177	1,8
111451	B	24	24	120	36	41	60	193	2,3
111456	B	26	26	130	39,5	44	65	209	3
111460	B	28	28	140	42	47	70	224	3,7
111467	B	32	32	160	47	53	80	256	5,3
111474	B	36	36	180	53	59	90	288	7,5
111483	B	40	40	200	58	65	100	320	10,4

Nominal size = max. rope diameter

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!