



Technical data


Material Cast steel (cold resistant to -20 °C)
Nominal tensile strength $\leq 2160 \text{ N/mm}^2$

Application area

Round strand ropes

Combination products

Rope socket Nemag 58A
Rope socket Nemag 57A

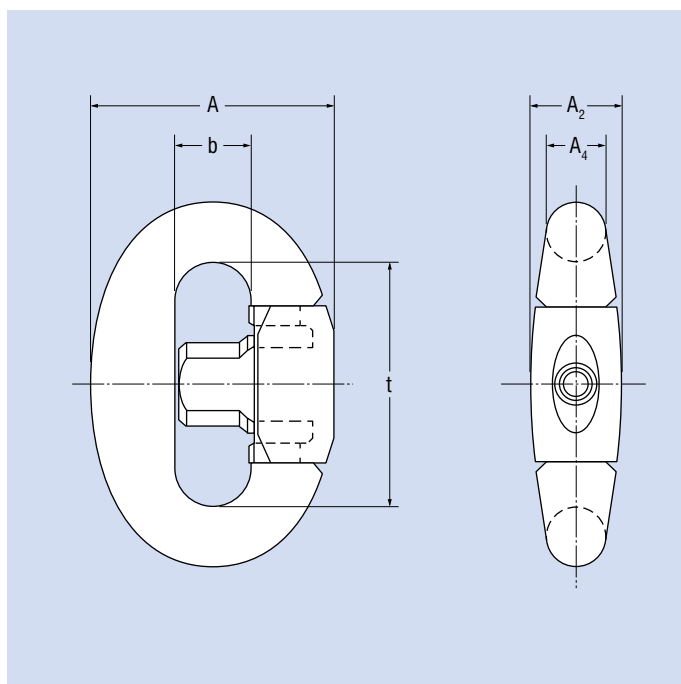

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

item number	NG	A mm	A ₂ mm	A ₄ mm	b mm	t mm	MBL kN	WLL kg	Weight kg
0354804	4	76	30	19	24,5	76	245,17	3000	0,9
0354805	5	84	32,5	21	27	84	323,62	4500	1,2
0354806	6	92	35	23	29,5	92	367,75	5000	1,5
0354807	7	100	38	25	32	100	480,53	7000	2
0354808	8	108	40,5	27	34,5	108	529,56	8000	2,5
0354809	9	116	43,5	29	37	116	588,4	9500	3,1
0354810	10	128	48	32	40,5	128	735,5	12000	4,4
0354811	11	140	53	35	44	140	931,63	15000	5,7
0354812	12	152	57	38	47,5	152	1078,73	17000	7,2
0354813	13	164	61,5	41	51	164	1323,9	21000	8,7
0354814	14	176	66	44	54	173	1569,06	26000	11
0354815	15	188	70,5	47	58	188	1667,13	30000	13,5
0354817	17	222	84	56	68	222	2549,73	42500	23

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!