



Technical data


Material Carbon steel (cold resistant to -20 °C)
Surface bright or galvanised

Application area

Round strand ropes

Combination products

Swaged fitting with thread 93A
Closed swaged fitting 584

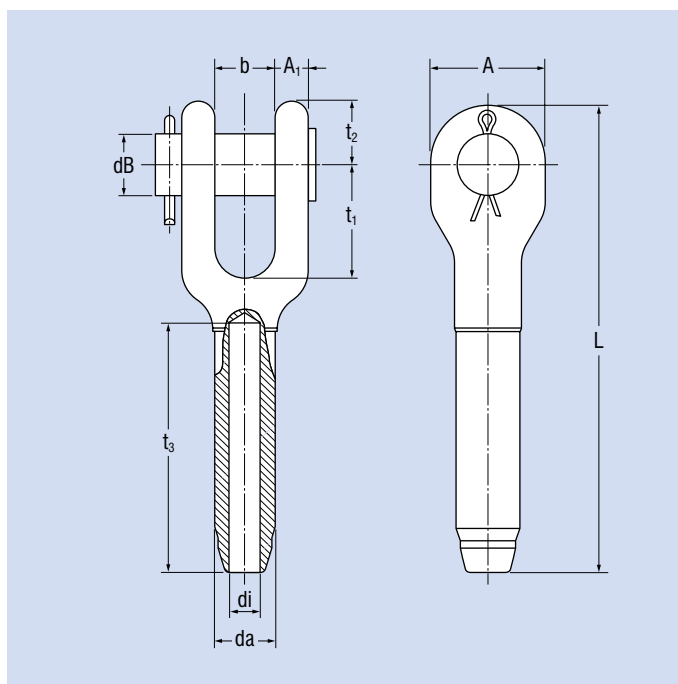

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds	A	A ₁	b	da	dB	di	L	t ₁	t ₂	t ₃	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
112288	6	6	35,1	7	17,5	12,7	17,5	6,85	122	38,1	20	54	0,24
112293	8	8	41,1	11,9	20,6	19,6	20,6	8,65	159	44,5	24	81	0,51
112296	10	9 – 10	41,1	11,9	20,6	19,6	20,6	10,4	159	44,5	24	81	0,59
112299	12	11 – 12	51	14,2	25,4	24,9	25,4	12,2	198	51	28	108	0,94
112303	13	13	51	14,2	25,4	24,9	25,4	14	198	51	28	108	0,94
112306	14	14	60,5	17,3	31,8	31,8	30,2	15,5	241	57	34	135	2,03
112310	16	16	60,5	17,3	31,8	31,8	30,2	17	241	57	34	135	2,05
112313	20	18 – 20	70	19,8	38,1	39,4	35,1	20,3	294	70	40	162	3,62
112318	22	22	79,5	23,9	44,5	43,2	41,1	23,9	341	82,5	46	189	5,23
112322	26	24 – 26	93,5	26,9	51	50,5	51	26,9	393	95,5	53	216	8,07
112327	28	28	103	30,2	57	57	57	30,2	440	108	59	243	11,5
112331	32	32	114	31	63,5	64,5	63,5	33,8	484	121	65	270	16,1
112334	36	34 – 36	127	35,1	63,5	71	63,5	36,8	532	133	71	297	19,8
112337	40	38 – 40	140	42,9	76	78	70	40,1	581	146	79	324	26,5
112341	44	44	170	53,5	89	86	89	47,2	676	171	92	378	40,3
112343	52	48 – 52	203	60	102	100	95,5	53,5	799	203	116	432	66

Pressed diameter on request

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!