


Technical data

Average fill factor	0,5322
Core	steel core
Lay direction	Right hand
Compacting	not compacted
Finish	Stainless steel
Standard	According to EN 12385-4

	Number of load-bearing wires in the external strands	RCN according to ISO 4309
Diameter range	114	04
from 2 – 16		



WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

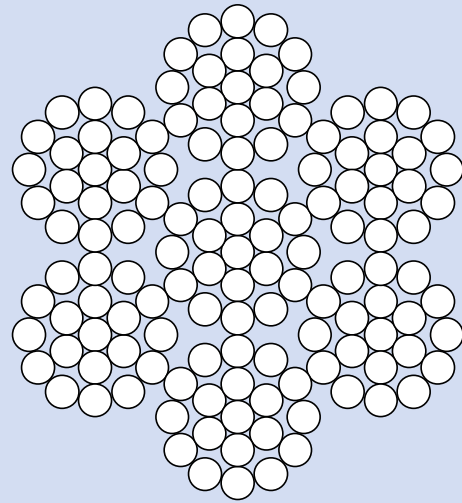

Sample schematic of rope construction used for representative purposes only. Actual construction dependent upon rope diameter.

Nominal rope Ø	Weight approx.	Minimum breaking force F _{min} 1570
mm	kg/100 m	kN
2	1,5	2,24
2,5	2,4	3,25
3	3,4	4,7
3,5	4,7	6,4
4	6,1	9,09
5	9,5	13
6	13,8	20,49
7	18,7	25,46
8	24,3	36,4
10	38,1	52,1
12	54,8	74,82
14	74,6	102
16	97,4	133,3

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes