


Technical data

Average fill factor	0,5278	
average spinning loss factor	0,8007	
Core	Steel core	
Lay direction	Right hand	
Compacting	not compacted	
Finish	Stainless steel	
Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 2 – 12	114	04



WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

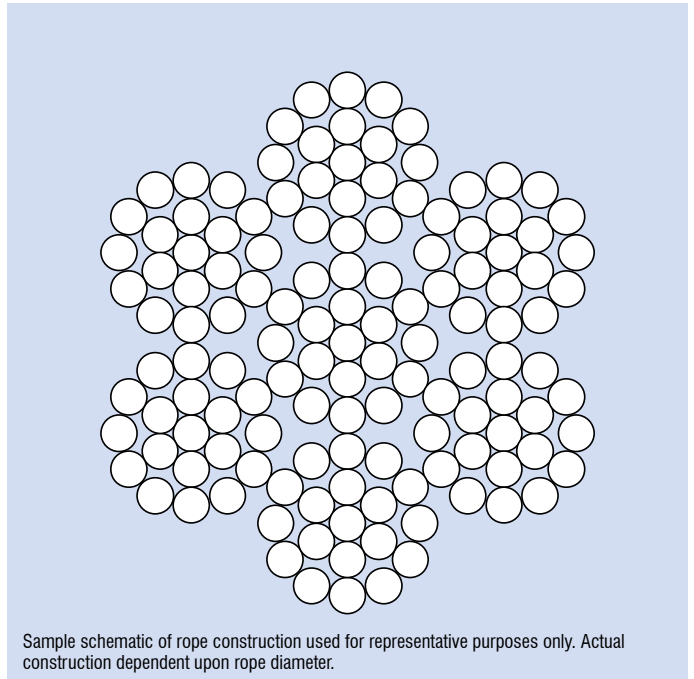

Sample schematic of rope construction used for representative purposes only. Actual construction dependent upon rope diameter.

Nominal rope Ø	Weight approx.	Minimum breaking force F _{min} 1570
mm	kg/100 m	kN
2	1,5	2,2
2,5	2,4	3,2
3	3,4	4,7
3,5	4,7	6,4
4	6,1	9,1
5	9,5	13
6	13,8	18,8
7	18,7	25,5
8	24,3	36,4
9	30,8	42,2
10	38,1	52,1
11	46,1	63,1
12	54,8	75

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes