


Technical data

Average fill factor	0,67
average spinning loss factor	0,802
Core	steel core
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	galvanized
Rope diameter tolerance	+1/+4%
Standard	According to EN 12385-4

	Number of load-bearing wires in the external strands	RCN according to ISO
Diameter range		4309
from 1 3/8 – 1 3/8	216	09

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

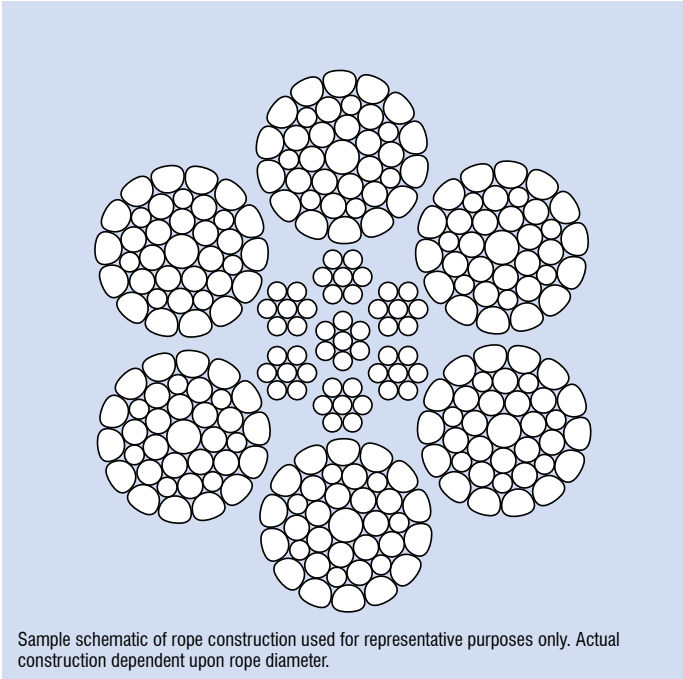

Nominal rope Ø inch	Weight approx. kg/100 m	Minimum breaking force F _{min}	
		1960 kN	2160 kN
1 3/8	571	1033	1176,8

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes