



Technical data


Material	Steel or stainless steel
Surface	bright or galvanised
Standard	ISO standard thread DIN 13-1
Loss factor	0,9

Application area

Round strand ropes

Combination products

Open swaged fitting 585

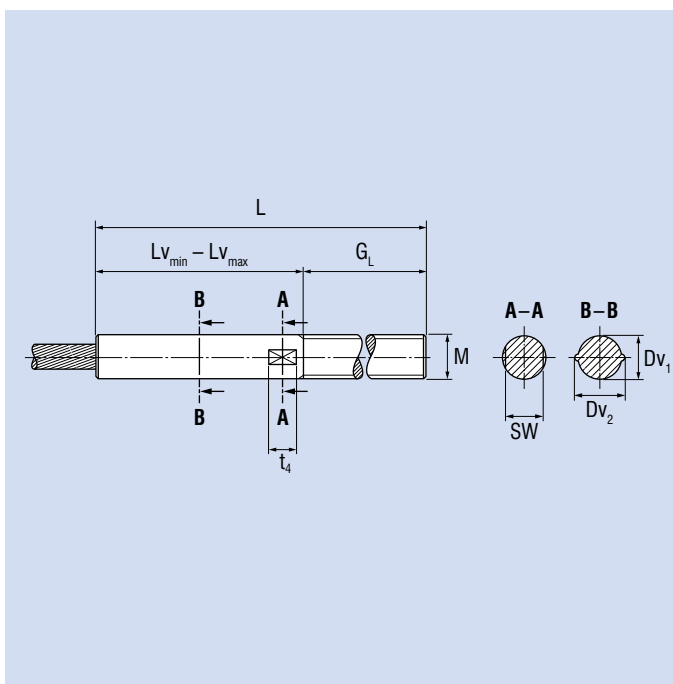

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds mm	M	Dv ₁ mm	Dv ₂ mm	L Tol mm	Lv _{min} mm	Lv _{max} mm	SW mm	t ₄ mm	MBL kN
03 93A 008	8	8	M16	16	18	±2	72	75	14	8	89,2
03 93A 009	9	9	M18	19	21,5	±2	81	84	16	8	109,6
03 93A 010	10	10	M20	20	22,7	±2	87	90	18	9	139,3
03 93A 011	11	11	M20	20	22,8	±3	93	98	18	9	139,3
03 93A 012	12	12	M22	22	25	±3	100	106	20	12	172,6
03 93A 013	13	13	M24	24	27,2	±3	115	121	22	15	200,6
03 93A 014	14	14	M27	28	31,5	±3	126	131	24	18	261,4
03 93A 015	15	15	M27	28	31,7	±3	133	140	24	18	261,4
03 93A 016	16	16	M30	30	33,8	±3	138	145	27	20	319
03 93A 017	17	17	M34	34	38,4	±3	152	158	30	22	394,5
03 93A 018	18	18	M34	34	38,5	±3	158	165	30	22	394,5
03 93A 019	19	19	M36	36	41	±3	165	173	34	22	464,6

thread length G_L = variable

total length = variable

thread: right hand or left hand

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!

Contact: seile@pfeifer.de

Copyright PFEIFER Holding GmbH & Co. KG | Information is subject to change and/or alteration. | Revision 12/2020

PFEIFER

www.pfeifer.info

Reference no.	NG	ds	M	Dv ₁	Dv ₂	L Tol	Lv _{min}	Lv _{max}	SW	t ₄	MBL
		mm		mm	mm	mm	mm	mm	mm	mm	kN
03 93A 020	20	20	M36	36	41,1	±3	170	179	34	22	464,6
03 93A 022	22	22	M40	40	45,5	±4	182	192	36	22	555
03 93A 024	24	24	M48	48	54,3	±4	204	213	46	26	837,9
03 93A 026	26	26	M48	48	54,5	±4	216	227	50	26	837,9
03 93A 028	28	28	M52	52	59	±4	237	249	50	30	999,7
03 93A 030	30	30	M56	56	63,4	±4	249	261	50	30	1154,5
03 93A 032	32	32	M60	62	70,3	±5	262	274	55	30	1343,2
03 93A 034	34	34	M60	62	70,7	±5	274	289	55	30	1343,2
03 93A 036	36	36	M64	66	75,1	±5	297	312	55	35	1521,8

thread length G_L = variable

total length = variable

thread: right hand or left hand

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!