



Technical data

Material bolt	Quenched and tempered steel
Material housing	Cast steel (cold resistant to -40 °C)
Surface housing	hot-dip galvanised
Material wedge	Cast steel (cold resistant to -40 °C)
Surface wedge	hot-dip galvanised
Loss factor	0,8


Application area

Round strand ropes up to and including rope strength class 2160

Combination products

Pouch Socket PSH 22A

Wirbel PSH PSS 12B

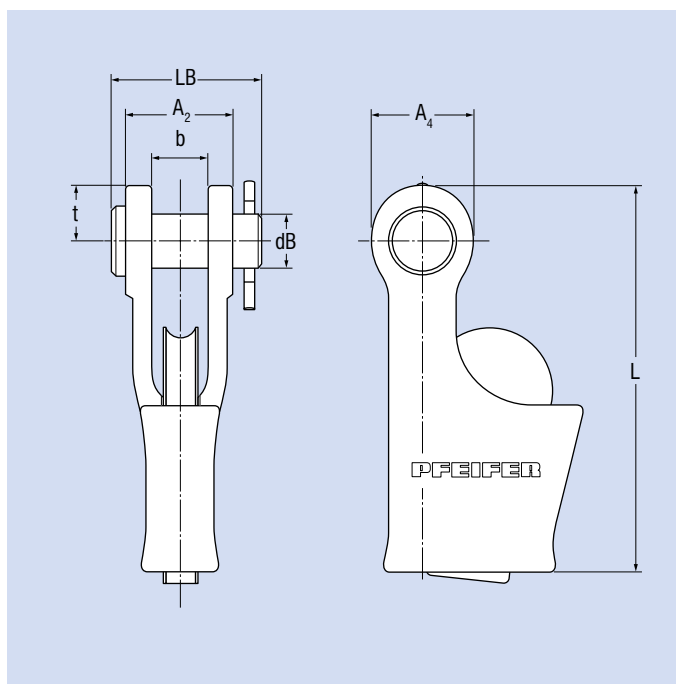

Don't use non-rotation resistant ropes with a turnable fixing point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death may occur.

Reference no.	NG	d _s	A ₂	A ₄	b	dB	LB	L	t	MBL	WLL	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg
289721	8 / 7	6 – 7	36	36	18	16	52	130	18	70	20	0,8
289720	8 / 8	8	36	36	18	16	52	130	18	70	20	0,8
270717	10 / 9	9	42,5	40	20,5	21	59,5	145	22	110	35	1,2
270733	10 / 10	10	42,5	40	20,5	21	59,5	145	22	110	35	1,2
270718	13 / 11	11	50	50	25	26	71	180	27	185	55	2,6
270734	13 / 12	12	50	50	25	26	71	180	27	185	55	2,6
270735	13 / 13	13	50	50	25	26	71	180	27	185	55	2,6
270719	17 / 13	13 – 14	60	58	32	30	85	225	31	316	95	4,7
270736	17 / 15	15 – 16	60	58	32	30	85	225	31	316	95	4,7
270737	17 / 17	17	60	58	32	30	85	225	31	316	95	4,7
270720	19 / 16	16 – 17	72	67	38	35	99	255	36,5	395	120	6,5
270738	19 / 18	18 – 19	72	67	38	35	99	255	36,5	395	120	6,5
270721	23 / 19	19 – 20	83	80	45	41	115	300	44	580	170	9,8
270739	23 / 21	21 – 23	83	80	45	41	115	300	44	580	170	9,8
270722	26 / 23	23 – 24	96	96	51	50	129	330	53	740	220	14,5
270741	26 / 25	25 – 26	96	96	51	50	129	330	53	740	220	14,5
270724	29 / 27	27 – 29	107	108	57	57	145	375	59	920	275	20
270726	33 / 30	30 – 31	120	115	63	63,5	159	425	63,5	1190	355	31
270728	33 / 32	32 – 33	120	115	63	63,5	159	425	63,5	1190	355	31

Additional sizes on enquiry.

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!