

PFEIFER Open Wedge Socket PSH 95A



For more information, contact your customer service representative or by contacting:

- + Weight optimized for ergonomic operation and cost reduction
- + Dimensions according market standards
- + Application up to -40°C (-40°F)
- + Optimized wedge for each rope diameter
- + Hot dip galvanized for improved corrosion protection

**PFEIFER
SEIL- UND HEBETECHNIK
GMBH**

DR.-KARL-LENZ-STRASSE 66
DE-87700 MEMMINGEN
PHONE +49 (0) 83 31-937-301
TELEFAX +49 (0) 83 31-937-123
E-MAIL wirerope@pfeifer.de
INTERNET www.wirerope.info



Technical data

Material bolt	Quenched and tempered steel
Material housing	Cast steel (cold resistant to -40 °C)
Surface housing	Hot-dip galvanised
Material wedge	Cast steel (cold resistant to -40 °C)
Surface wedge	Hot-dip galvanised
Loss factor	0,8


Application area

Round strand ropes

Combination products

Pouch Socket LH 570/85A

Swivel Pouch Socket LH 571/86A

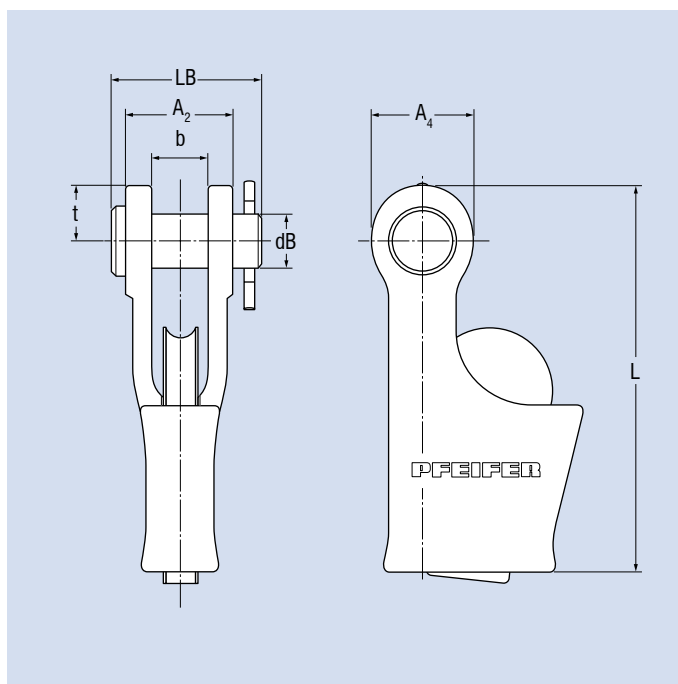

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds	A ₂	A ₄	b	dB	LB	L	t	WLL	MBL	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg
289721	8 / 7	7	36	36	18	16	52	130	18	20	70	0,8
289720	8 / 8	8	36	36	18	16	52	130	18	20	70	0,8
270717	10 / 9	9	42,5	40	20,5	21	59,5	145	22	35	110	1,2
270733	10 / 10	10	42,5	40	20,5	21	59,5	145	22	35	110	1,2
270718	13 / 11	11	50	50	25	26	71	180	27	55	185	2,6
270734	13 / 12	12	50	50	25	26	71	180	27	55	185	2,6
270735	13 / 13	13	50	50	25	26	71	180	27	55	185	2,6
270719	17 / 13	13 – 14	60	58	32	30	85	225	31	95	316	4,7
270736	17 / 15	15 – 16	60	58	32	30	85	225	31	95	316	4,7
270737	17 / 17	17	60	58	32	30	85	225	31	95	316	4,7
270720	19 / 16	16 – 17	72	67	38	35	99	255	36,5	120	395	6,5
270738	19 / 18	18 – 19	72	67	38	35	99	255	36,5	120	395	6,5
270721	23 / 19	19 – 20	83	80	45	41	115	300	44	170	580	9,8
270739	23 / 21	21 – 23	83	80	45	41	115	300	44	170	580	9,8
270722	26 / 23	23 – 24	96	96	51	50	129	330	53	220	740	14,5
270741	26 / 25	25 – 26	96	96	51	50	129	330	53	220	740	14,5
270724	29 / 27	27 – 29	107	108	57	57	145	375	59	275	920	20
270726	33 / 30	30 – 31	120	115	63	63,5	159	425	63,5	355	1190	31
270728	33 / 32	32 – 33	120	115	63	63,5	159	425	63,5	355	1190	31

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!