


**Technical data**

Average fill factor	0,532
Core	Steel core
Lay direction	Right hand
Compacting	not compacted
Finish	Galvanized
nominal metallic cross-sectional area factor C	0,418
Standard	According to EN 12385-4

	Number of load-bearing wires in the external strands	RCN according to ISO 4309
Diameter range from 3/8 – 1/2	114	04

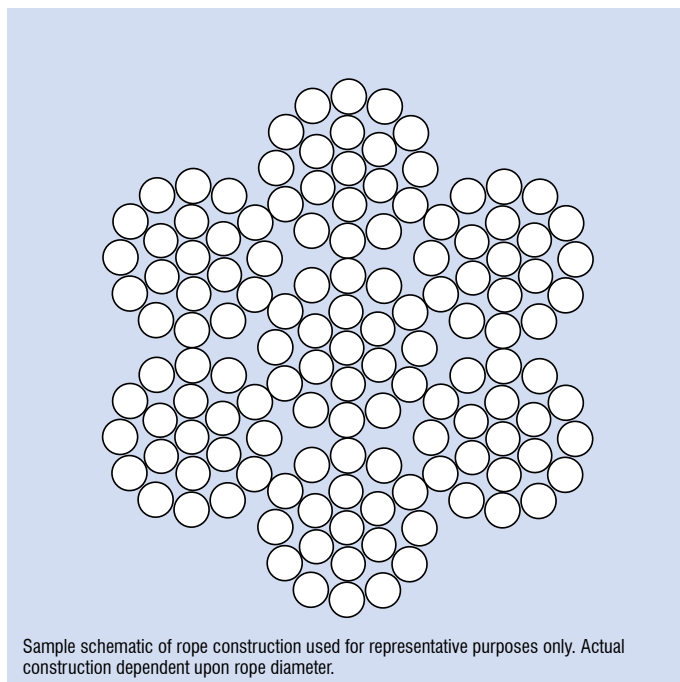

Nominal rope Ø inch	Weight approx. kg/100 m	Minimum breaking force Fmin 1770 kN	Minimum breaking force Fmin 1960 kN
3/8	38,1	64,1	71
1/2	54,9	92,3	102,2

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at [www.pfeifer.info/manual-strand-ropes](http://www.pfeifer.info/manual-strand-ropes)