


**Technical data**

Average fill factor	0,488
Core	fibre core
Lay direction	choice of right hand or left hand
Compacting	not compacted
Finish	choice of bright or galvanised
nominal metallic cross-sectional area factor C	0,384
Standard	According to EN 12385-4

	Number of load-bearing wires in the external strands	RCN according to ISO 4309
Diameter range from 6 – 36	114	04

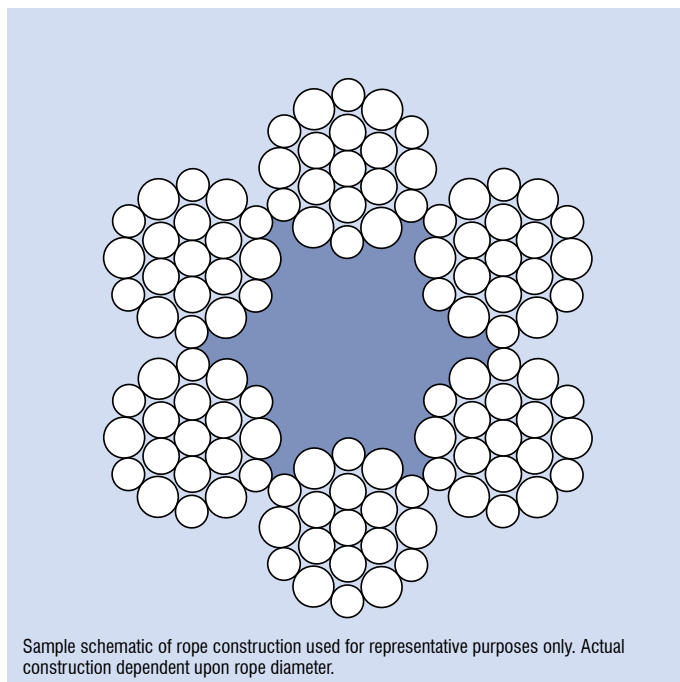

Nominal rope Ø	Weight approx.	Minimum breaking force F <sub>min</sub> 1770
mm	kg/100 m	kN
6	12,9	21
7	17,6	28,6
8	23	37,4
9	29,1	47,3
10	35,9	58,4
11	43,3	70,7
12	51,7	84,1
13	60,7	98,7
14	70,4	114
16	91,9	150
18	116	189
20	144	234
22	174	283
24	207	336
26	243	395
28	281	458
32	368	598
36	465	757

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at [www.pfeifer.info/manual-strand-ropes](http://www.pfeifer.info/manual-strand-ropes)