


Technical data

Average fill factor	0,6441
average spinning loss factor	0,83
Core	steel core
Lay type	lang lay
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	choice of bright or galvanised
Rope diameter tolerance	0/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 10 – 11	105	23-2

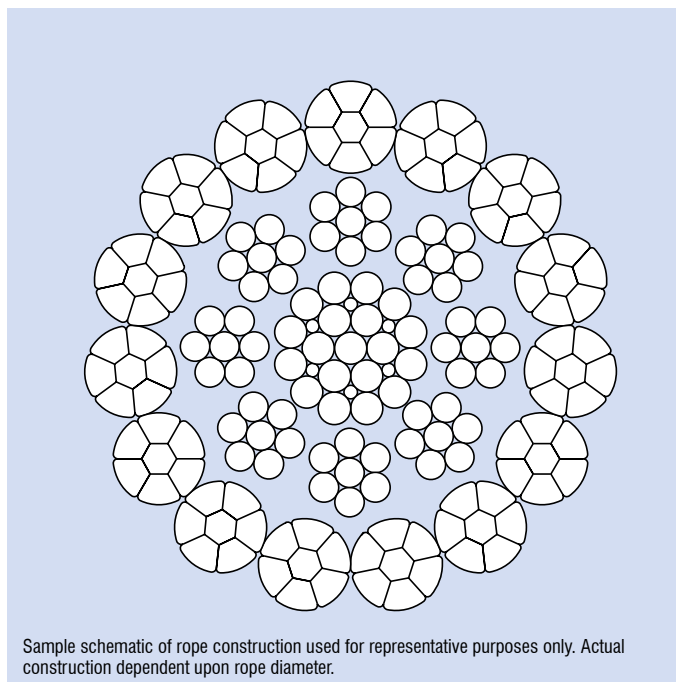

Nominal rope Ø	Weight approx.	Minimum breaking force F _{min} 1770	Minimum breaking force F _{min} 1960
mm	kg/100 m	kN	kN
10	47	74,3	82,3
11	56	89,9	99,6

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes