


Technical data

Average fill factor	0,65
average spinning loss factor	0,83
Core	Steel core
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	Galvanized
Rope diameter tolerance	+1/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 8 – 11	70	02
from 12 – 19	170	05

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

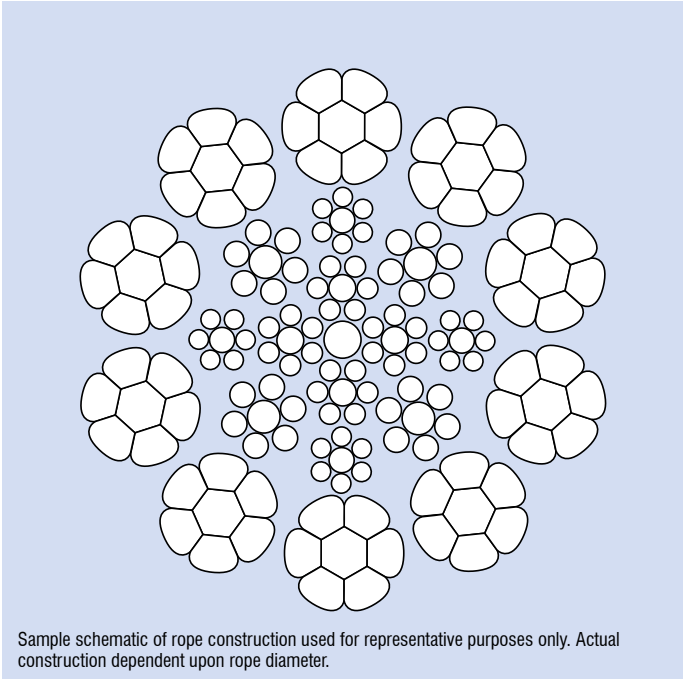

Nominal rope Ø	Weight approx.	Minimum breaking force Fmin
mm	kg/100 m	2160 kN
8	30	62
9	35	73,2
10	45	92,1
11	53	110
12	67	139
13	78	161
14	92	190
15	105	217
16	118	244
18	151	311
19	173	358

Other rope diameters and constructions on enquiry.
Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes