


**Technical data**

Core	steel core
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	choice of bright or galvanised
Rope diameter tolerance	+0/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 12 – 36	156	06

**WARNING:** Never use with a swivel – failure to comply may result in serious damages and injuries

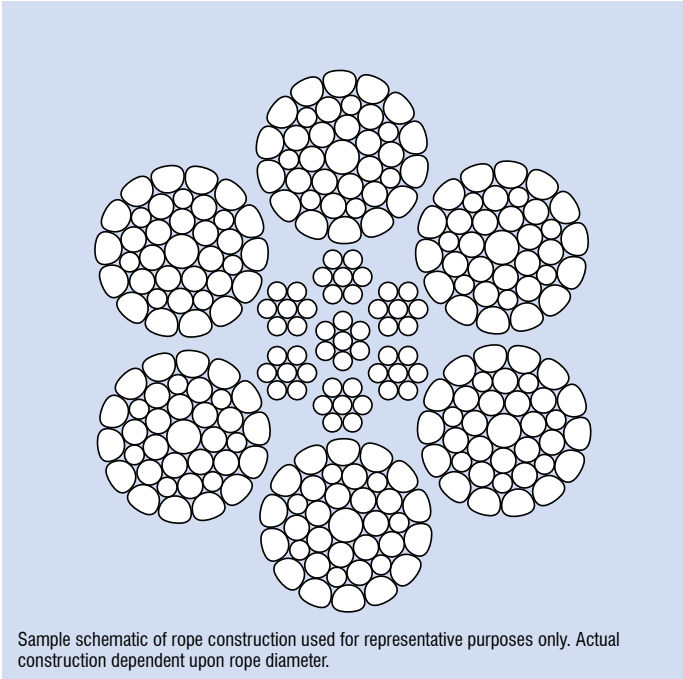

Nominal rope Ø mm	Weight approx. kg/100 m	Minimum breaking force F <sub>min</sub>	
		1960 kN	2160 kN
12	69	116	128
13	81	136	150
14	93	158	174
15	107	181	199
16	122	206	227
17	138	232	256
18	155	260	287
19	172	290	320
20	191	321	354
21	210	354	391
22	231	389	429
23	252	425	468
24	275	463	510
25	298	502	554
26	323	543	599
28	374	630	694
32	488	823	907
34	551	929	—
36	618	1041	—

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at [www.pfeifer.info/manual-strand-ropes](http://www.pfeifer.info/manual-strand-ropes)