


Technical data

Core	full plastic impregnation of the compacted steel core to further extend fatigue life, improve structural stability
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	choice of bright or galvanised
Standard	According to EN 12385-4

	Number of load-bearing wires in the external strands	RCN according to ISO 4309
Diameter range	—	09
from 22 – 22	—	09

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

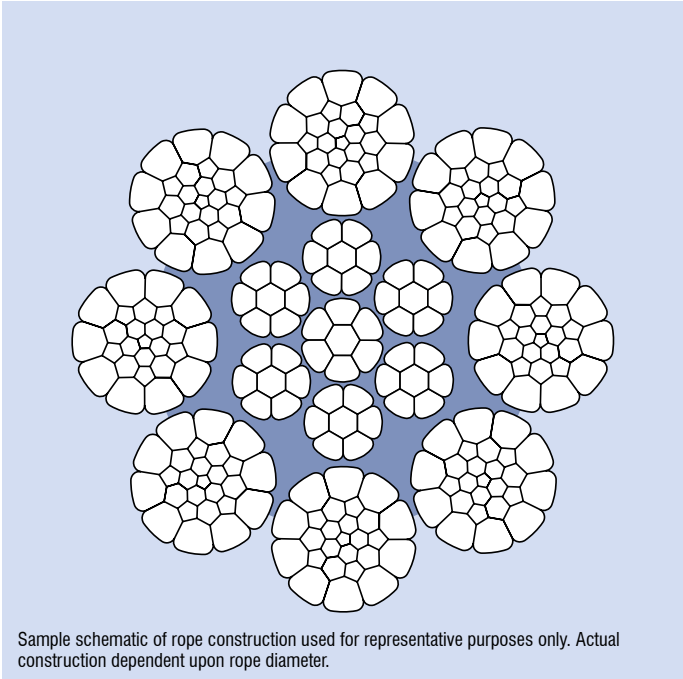

Nominal rope Ø	Weight approx.	Minimum breaking force F _{min}	
		1960	2060
mm	kg/100 m	kN	kN
22	234	451	497

Other rope diameters and constructions on enquiry.
Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes