


Technical data

Average fill factor	0,766
average spinning loss factor 2160 N/mm ²	0,84
Core	steel core compacted
Lay direction	Right hand
Compacting	strands compacted – thereby extra wear resistant
Finish	Galvanized
Rope diameter tolerance	0/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO
from 46 – 46	208	4309 09

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

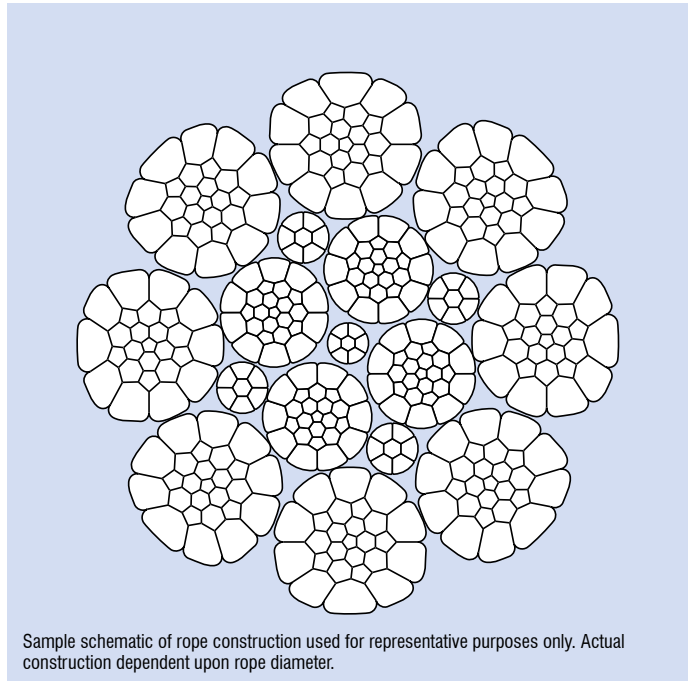

Nominal rope Ø	Weight approx.	Minimum breaking force F _{min} 2160
mm	kg/100 m	kN
46	1146	2310

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes