


Technical data	
Average fill factor	0,717
Core	steel core compacted
Lay type	lang lay
Lay direction	Right hand
Compacting	strands compacted – thereby extra wear resistant
Finish	galvanized
Rope diameter tolerance	+1/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 8 – 26	84	23-1

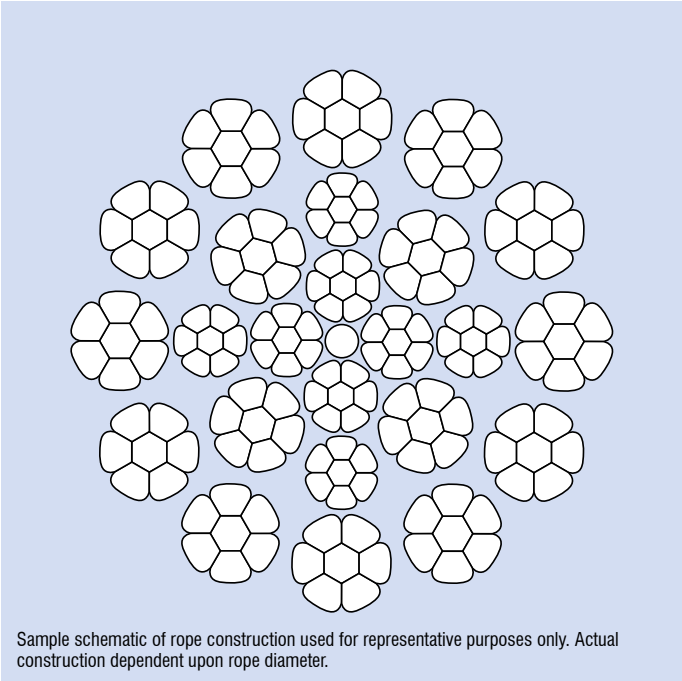

Nominal rope Ø	Weight approx.	Minimum breaking force Fmin
mm	kg/100 m	1960 kN
8	31	56,4
9	40	71,4
10	49	88,2
12	71	127
13	83	149
14	96	173
16	125	226
18	159	286
20	196	353
22	237	427
26	331	596

Other rope diameters and constructions on enquiry.