
Technical data

Average fill factor	0,738
Core	steel core compacted
Lay type	lang lay
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	bright
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 14 – 28	112	23-2

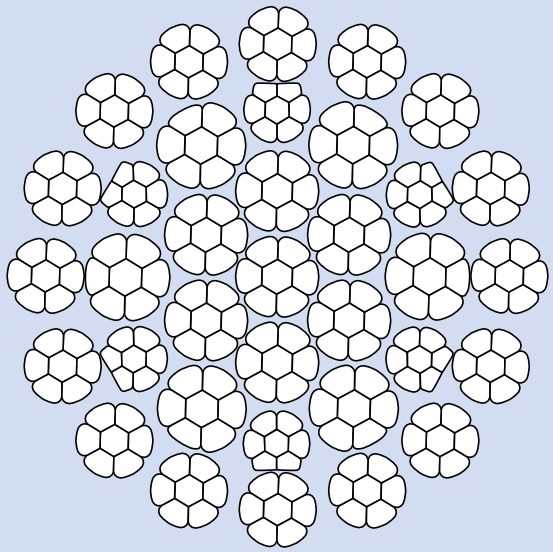

Sample schematic of rope construction used for representative purposes only. Actual construction dependent upon rope diameter.

Nominal rope Ø	Weight approx.	Minimum breaking force Fmin 1960	Minimum breaking force Fmin 2160
mm	kg/100 m	kN	kN
14	99	287	201
16	129	245	262
17	154	276	314
18	163	310	332
19	182	345	370
20	201	382	410
22	244	463	496
24	290	551	591
26	340	646	693
28	395	750	804

Other rope diameters and constructions on enquiry.

Contact: seile@pfeifer.de
Copyright PFEIFER Holding GmbH & Co. KG| Information is subject to change and/or alteration. | Revision 6/2026

PFEIFER