
P 1515 Round strand rope, high performance rotation resistant

Technical data

Average fill factor	0,752
Core	steel core compacted
Lay type	lang lay
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	bright
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 14 – 28	112	23-2

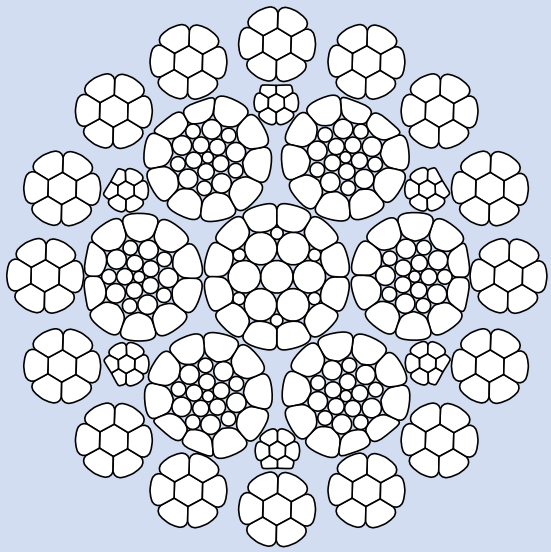

Sample schematic of rope construction used for representative purposes only. Actual construction dependent upon rope diameter.

Nominal rope Ø	Weight approx.	Minimum breaking force Fmin 1960	Minimum breaking force Fmin 2160
mm	kg/100 m	kN	kN
14	101	191	205
16	133	249	267
17	159	298	320
18	168	315	338
19	187	351	377
20	207	389	418
22	251	471	505
24	298	561	602
26	350	658	706
28	406	763	819

Other rope diameters and constructions on enquiry.

Contact: seile@pfeifer.de
Copyright PFEIFER Holding GmbH & Co. KG| Information is subject to change and/or alteration. | Revision 6/2026

PFEIFER