


Technical data

Average fill factor	0,6154
average spinning loss factor	0,85
Core	Steel core
Lay direction	Right hand
Compacting	not compacted
Finish	choice of bright or galvanised
Rope diameter tolerance	0/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 6 – 6	63	02
from 7 – 20	72	02

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

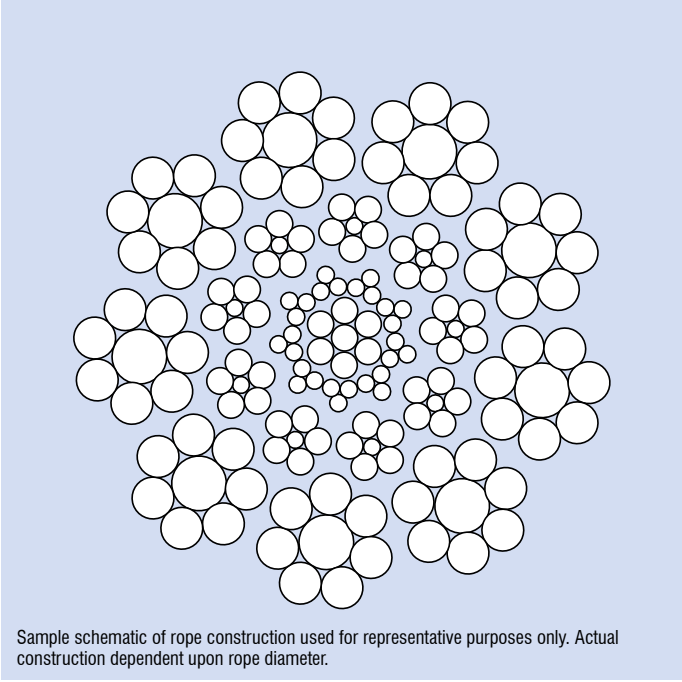

Nominal rope Ø mm	Weight approx. kg/100 m	Minimum breaking force F _{min}	
		1770 kN	1960 kN
6	16	24,5	27,7
7	24	36,5	41
8	29	44,8	49,5
9	39	59,9	67,3
10	46	72,3	81,3
11	59	91,6	103
12	66	102	115
13	76	116	133
14	89	133	157
15	101	155	178
16	117	181	206
17	133	210	233
18	149	235	261
19	166	263	291
20	184	291	322

Other rope diameters and constructions on enquiry.
Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes