
Technical data

Average fill factor	0,72
E-module (10 – 30 % Fmin)	122 kN/mm²
E-module (10 – 30 % Fmin) tolerance	±4 kN/mm²
Core	steel core
Lay direction	Right hand
Compacting	Compacted rope – therefore particularly resistance to crushing and abrasion
Finish	galvanized
Rope diameter tolerance	+2/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 8 – 26	156	06

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

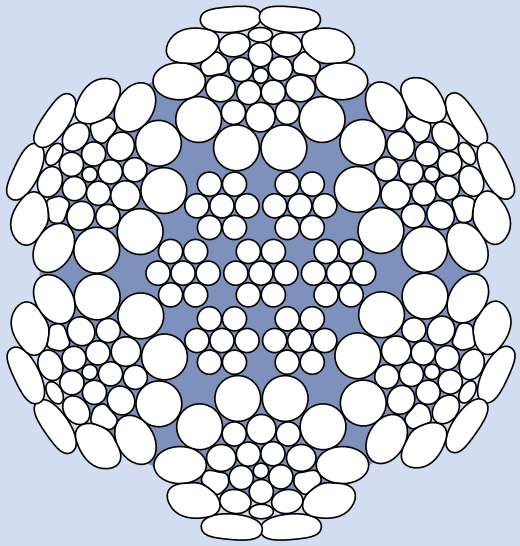

Sample schematic of rope construction used for representative purposes only. Actual construction dependent upon rope diameter.

Nominal rope Ø mm	Weight approx. kg/100 m	Minimum breaking force Fmin 1960 kN
8	34	63
9	43	79
10	52	103
11	64	118
12	75	140
13	88	164
14	103	188
16	134	256
18	169	323
20	210	400
22	253	475
24	302	564
26	354	660

Other rope diameters and constructions on enquiry.
Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes

Contact: seile@pfeifer.de
Copyright PFEIFER Holding GmbH & Co. KG| Information is subject to change and/or alteration. | Revision 7/2026