


Technical data

Average fill factor	0,682
Core	steel core
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	choice of bright or galvanised
Rope diameter tolerance	+1/+4%
Standard	According to EN 12385-4

	Number of load-bearing wires in the external strands	RCN according to ISO 4309
Diameter range from 10 – 48	216	09

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

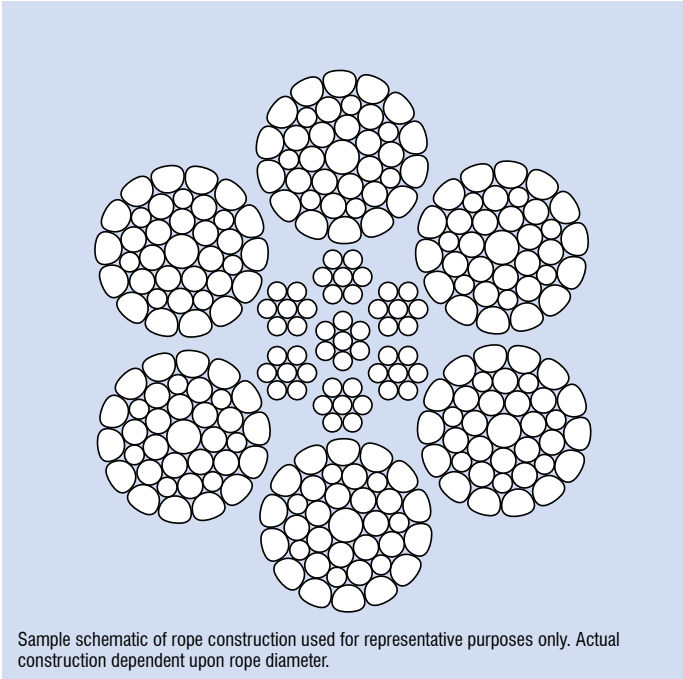

Nominal rope Ø mm	Weight approx. kg/100 m	Minimum breaking force F _{min}	
		1960 kN	2160 kN
10	46	86	91
11	56	99	113
12	67	114	127
13	78	147	157
14	91	170	183
15	104	195	208
16	119	218	228
17	134	246	270
18	150	276	298
19	168	304	323
20	186	335	355
22	225	400	423
24	267	489	518
25	281	512	546
26	314	578	610
28	364	657	700
30	418	757	806
32	475	846	914
34	518	916	960
36	581	1065	1120
38	647	1165	1190
40	717	1295	1320
42	790	1425	—
44	867	1505	—
46	948	1665	—
48	1032	1885	—

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes

