


**Technical data**

Average fill factor	0,65
average spinning loss factor	0,87
Core	plastic coated steel core – therefore increased structural strength
Lay type	choice of regular/ordinary lay or langs lay
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	bright
Rope diameter tolerance	+0% / +4%
Standard	According to EN 12385-4

	Number of load-bearing wires in the external strands	RCN according to ISO 4309
Diameter range		
from 34 – 36	—	

**WARNING:** Never use with a swivel – failure to comply may result in serious damages and injuries

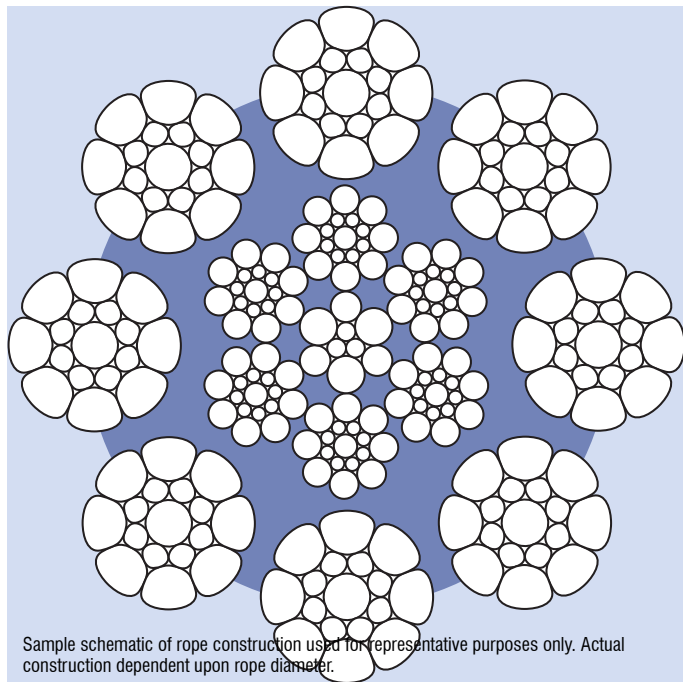

Nominal rope Ø	Weight approx.	Minimum breaking force F <sub>min</sub>
mm	kg/100 m	2160 kN
34	525	1065
36	589	1242

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at [www.pfeifer.info/manual-strand-ropes](http://www.pfeifer.info/manual-strand-ropes)