


Technical data

Average fill factor	0,72
average spinning loss factor	0,875
Core	steel core compacted
Lay direction	Right hand
Compacting	Compacted rope – therefore particularly resistance to crushing and abrasion
Finish	choice of bright or galvanised
Rope diameter tolerance	+0/+4%
Standard	According to EN 12385-4

	Number of load-bearing wires in the external strands	RCN according to ISO 4309
Diameter range		
from 16 – 20	182	08

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

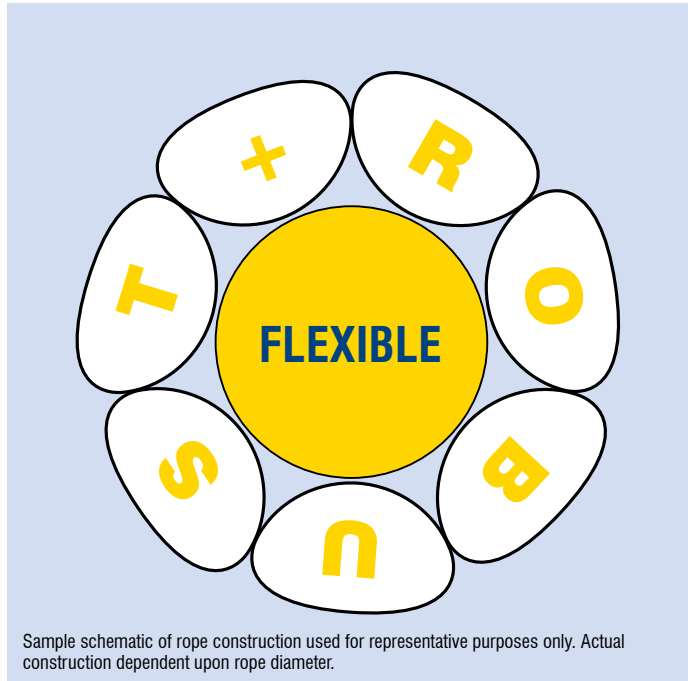

Nominal rope Ø	Weight approx.	Minimum breaking force F _{min} 2060
mm	kg/100 m	kN
16	124	271
18	160	347
20	195	428

Other rope diameters and constructions on enquiry.
Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes