


Technical data

Average fill factor	0,73
average spinning loss factor 1960	0,86
average spinning loss factor 2160	0,83
Core	steel core
Lay type	lang lay
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	bright
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO
from 23 – 32	112	23-2

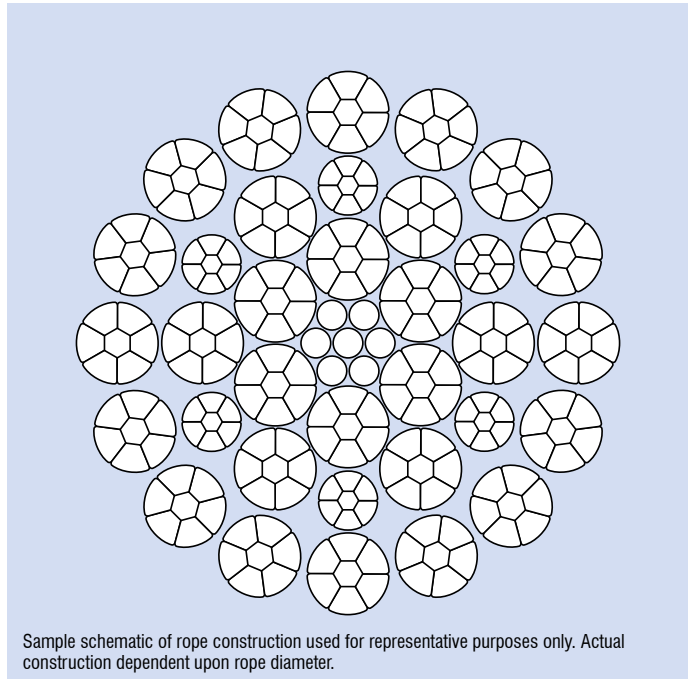

Nominal rope Ø	Weight approx.	Minimum breaking force F _{min} 2160
mm	kg/100 m	kN
23	268	548
25	314	647
26	342	700
27	368	757
28	395	812
30	455	932
32	517	1042

Other rope diameters and constructions on enquiry.