
Technical data

Average fill factor	0,62
average spinning loss factor	0,855
Core	plastic coated steel core – therefore increased structural strength
Lay direction	choice of right hand or left hand
Compacting	not compacted
Finish	choice of bright or galvanised
Rope diameter tolerance	+2/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 18 – 40	152	06

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

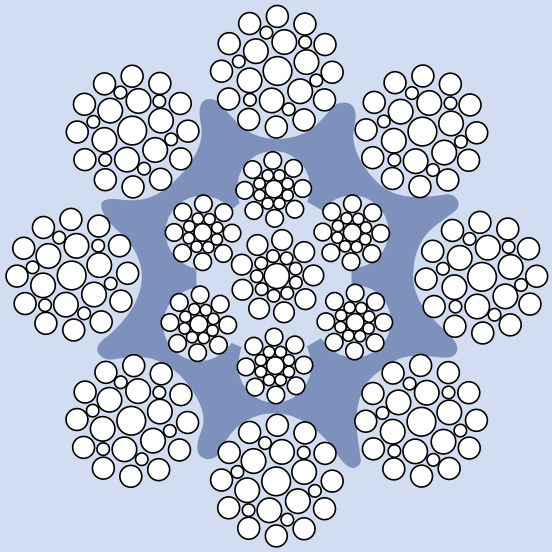

Sample schematic of rope construction used for representative purposes only. Actual construction dependent upon rope diameter.

Nominal rope Ø mm	Weight approx. kg/100 m	Minimum breaking force Fmin 1960 kN
18	141	266
20	175	328
22	215	401
24	249	473
25	273	514
26	292	559
28	341	639
30	391	739
32	446	840
34	501	951
35	531	1005
36	562	1058
38	678	1189
40	746	1259

Other rope diameters and constructions on enquiry.
Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes

Contact: seile@pfeifer.de
Copyright PFEIFER Holding GmbH & Co. KG| Information is subject to change and/or alteration. | Revision 5/2026