
Technical data

Average fill factor	0,67
average spinning loss factor	0,83
Core	plastic coated steel core – therefore increased structural strength
Lay type	choice of regular/ordinary lay or langs lay
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	galvanized
Rope diameter tolerance	+0%/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 16 – 32	208	09

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

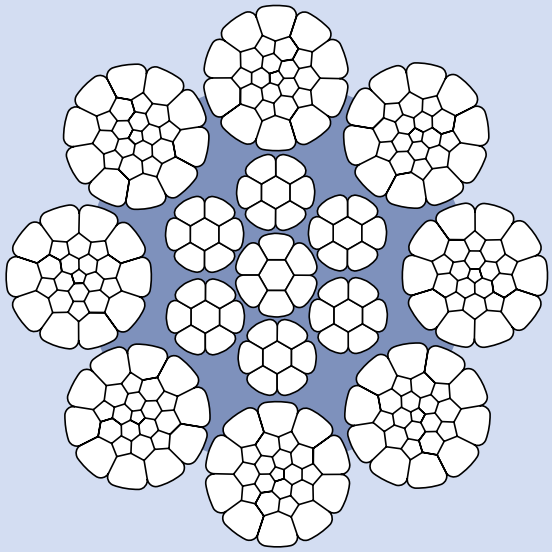

Sample schematic of rope construction used for representative purposes only. Actual construction dependent upon rope diameter.

Nominal rope Ø mm	Weight approx. kg/100 m	Minimum breaking force Fmin 1960 kN
16	116	229
18	149	288
20	184	355
22	221	433
24	263	514
25	286	558
26	311	607
28	357	697
30	412	803
32	467	911

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes

Contact: seile@pfeifer.de

Copyright PFEIFER Holding GmbH & Co. KG| Information is subject to change and/or alteration. | Revision 5/2026