


Technical data

| | | |
|-------------------------|---|--|
| Core | steel core compacted | |
| Lay direction | choice of right hand or left hand | |
| Compacting | Compacted rope – therefore particularly resistance to crushing and abrasion | |
| Finish | choice of bright or galvanised | |
| Rope diameter tolerance | +2%/+4% | |
| Standard | According to EN 12385-4 | |

| | | |
|----------------|--|---------------------------|
| Diameter range | Number of load-bearing wires in the external strands | RCN according to ISO 4309 |
| from 20 – 42 | — | |

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

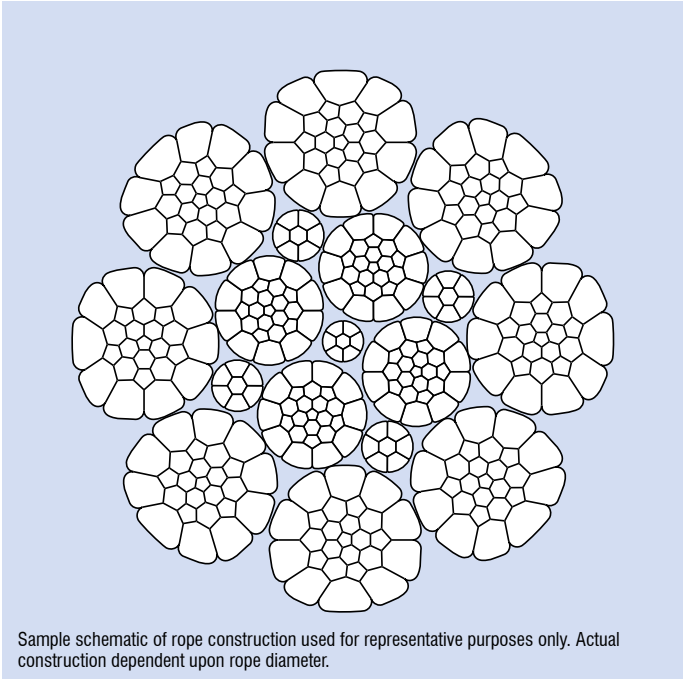

| Nominal rope Ø | Weight approx. | Minimum breaking force F _{min} 1960 |
|----------------|----------------|--|
| mm | kg/100 m | kN |
| 20 | 210 | 404 |
| 24 | 300 | 581 |
| 28 | 410 | 790 |
| 35 | 640 | 1236 |
| 40 | 840 | 1614 |
| 42 | 930 | 1779 |

Other rope diameters and constructions on enquiry.
Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes