




Technical data

Material	Cast steel (cold resistant to $-40\text{ }^{\circ}\text{C}$)
Surface bolt	painted or galvanised
Surface housing	painted
Nominal tensile strength	$\leq 2160\text{ N/mm}^2$
Loss factor	0,8

Application area

Round strand ropes

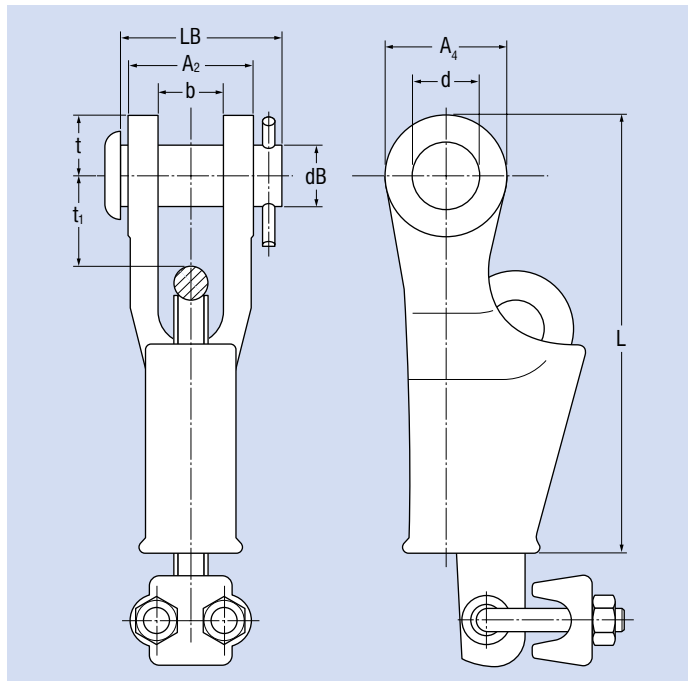

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds	A ₂	A ₄	b	b Tol	d	d Tol	dB	LB	L	t	t ₁	MBL	Weight
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg
110920	10	9 – 10	43	39,6	20,6	$\pm 2,29$	22,6	$\pm 0,4$	20,6	54,1	145	22,4	47,8	127	1,44
135631	13	11 – 13	50,8	49,3	25,4	$\pm 2,29$	27,5	$\pm 0,75$	25,4	65	175	26,9	32	206	2,79
110922	16	14 – 16	60,2	57,2	31,8	$\pm 2,29$	32,5	$\pm 0,75$	30,2	82,6	210	31	50,5	324	4,56
110926	19	18 – 19	71,7	66,8	38,1	$\pm 2,29$	37,4	$\pm 0,75$	35,1	92,2	251	35,6	61,2	422	6,58
110928	22	20 – 22	82,7	79,5	44,5	$\pm 2,29$	43,7	$\pm 0,75$	41,4	109	286	42,4	63	608	11,25
110932	26	24 – 26	95,8	95,5	51	$\pm 2,29$	53,6	$\pm 0,75$	50,8	119	325	51	77,2	833	15,8
110935	28	28 – 28	107,8	108	57	$\pm 2,29$	60,5	$\pm 0,75$	57	138	365	57	65	1079	20,5
110937	32	30 – 32	120,3	114	66,5	$\pm 2,29$	66,8	$\pm 0,75$	63,5	156	415	59,5	74,7	1275	29,4

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!