




Technical data

Material clamping jaw	Cast Steel
Surface clamping jaw	Electrogalvanized
Material clamp	steel
Surface clamp	yellow chromated
Material nut	steel
Surface nut	yellow chromated

Application area

Round strand ropes

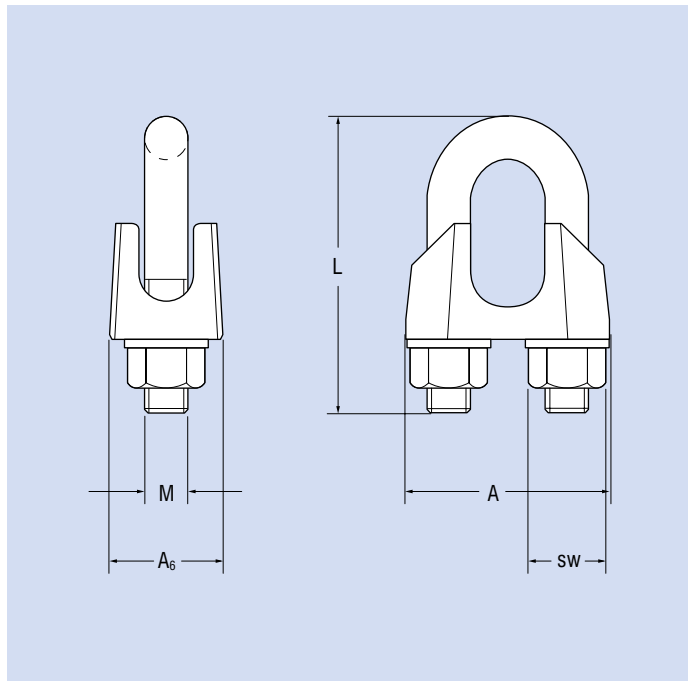

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds	M	A	A ₆	L	SW	Weight
		mm		mm	mm	mm	mm	kg
280301	5	5	M5	25	13	25	8	0,02
280299	6,5	6,5	M6	30	16	32	10	0,04
280297	8	8	M8	39	20	41	13	0,08
280300	10	10	M8	40	20	46	13	0,09
280298	12	12	M10	50	24	56	16	0,17
280302	14	14	M12	59	28	66	18	0,28
280303	16	16	M14	64	32	76	21	0,43
280305	19	19	M14	68	32	83	21	0,49
280304	22	22	M16	74	34	96	24	0,68
280308	26	26	M20	84	38	118	30	1,17
280306	30	30	M20	95	41	131	30	1,4
280307	34	34	M22	105	45	150	34	2,13
280309	40	40	M24	117	49	167	34	2,68

The nominal size of the wire rope clamp corresponds to the maximum rope diameter. For intermediate sizes of the nominal rope diameter, the next larger clamp size is to be used. The nominal size 5 is valid only for nominal rope diameter 5 mm.

Please have a look about proper use according to BS EN 13411-5. Wire rope clamps with U-shaped clamp stirrups are not suitable for use with spiral ropes!

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!