




Technical data

Material clamping jaw Stainless steel

Application area

Round strand ropes

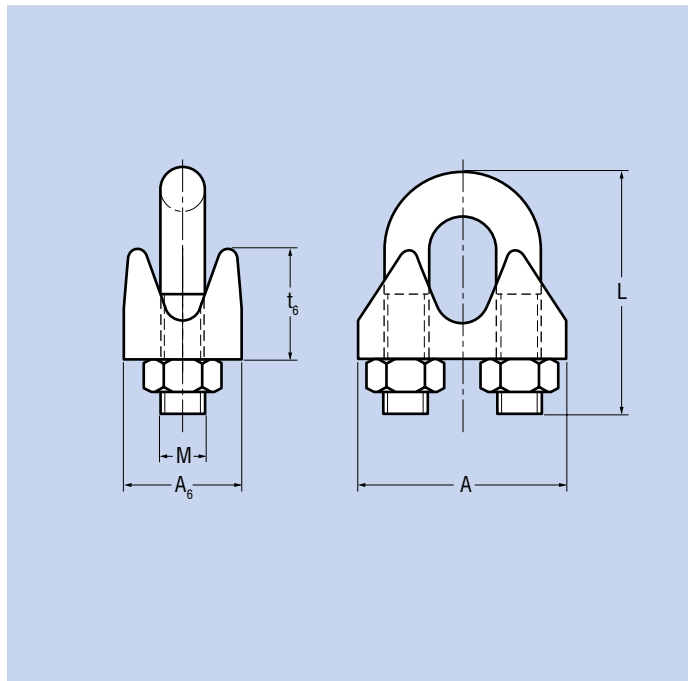

Don't use non-rotation resistant and rotation resistant ropes with a turnable fixed point (e. g. swivel). The end termination has to be fixed against rotation as well. If this is not observed considerable damage, serious injury or death will occur.

Reference no.	NG	ds mm	M	A mm	A ₆ mm	L mm	t ₆ mm	Weight kg
110946	2	2	M3	14	15	17	10	0,01
110947	3	3	M3	16	15	21	12	0,01
110948	4	4	M4	18	18	23	13	0,01
110949	5	5	M5	20	21	27	16	0,02
110950	6	6	M6	27	23	32	18	0,04
110951	8	8	M8	34	28	41	20	0,04
110952	10	10	M10	44	36	51	23	0,09
110953	12	12	M12	50	38	62	27	0,24
110956	16	16	M14	59	47	79	35	0,22
110957	19	19	M14	61	52	81	38	0,48
110958	22	22	M16	72	61	98	45	0,89

The nominal size of the wire rope clamp corresponds to the maximum rope diameter. For intermediate sizes of the nominal rope diameter, the next larger clamp size is to be used. The nominal size 5 is valid only for nominal rope diameter 5 mm.

Dimensions correspond to nominal sizes without tolerance and without coating. Please contact us for exact measurements!